


JOYOLIGHT

2020-04

JLM-192-24-JP2

SPEC

POWER

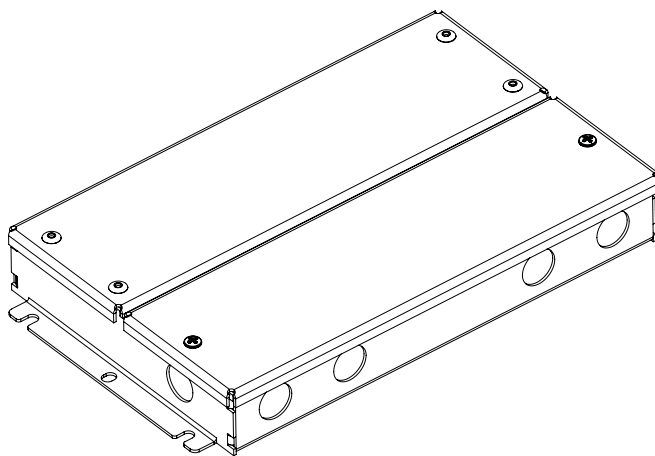

#12, 5200 Dixie Rd,
Mississauga, ON
Canada L4W 1E4
www.joyolight.ca
info@joyolight.com




Features

- Output constant Voltage, class 2 multi-channels
- UL, cUL listed, Class 2, Type HL
- Range: 100-277VAC
- Built-in active PFC function
- Efficiency up to 89%
- Protections: short circuit/ over load/ over temperature
- Cooling by free air convection
- Full protection metal housing, for dry, damp and wet locations
- Dimming function:
 - Phase dimming: work with forward phase/ leading edge, MLV and Reverse phase/ trailing edge, ELV, TRIAC dimmers
 - 0-10V dimming: 0-10V/1-10V/Potentiometer/10V PWM 4 in 1
 - Dimming range: 0-100%
- Suitable for LED lighting and moving sign applications


Class 2
TYPE HL

JLM-192-24-JP2		
Certification		UL cUL FCC
Output	DC Voltage	24V
	Rated Current	2*4A
	Rated Power	192W (2*96W)
	Voltage Tolerance	±0.5V
	Voltage Regulation	±0.5%
	Load Regulation	±1%
Input	Voltage Range	100-277VAC
	Frequency Range	47-63Hz
	Power Factor (Typ.) @ full load	0.99@120VAC 0.94@277VAC
	THD (Typ.) @ full load	<20%
	Efficiency (Typ.) @ full load	87%@120V 89%@277VAC
	AC Current (Max.)	2.3A@100VAC
	Inrush Current (Typ.)	19A, 50%, 1.3ms @120VAC; 38A, 50%, 960us @277VAC
	Leakage current	<0.50mA
Protection	Short Circuit	shut down o/p voltage, re-power on to recover after fault condition is removed
	Over Loading	≤120% Hiccup mode, recovers automatically after fault condition is removed
	Over temperature	100°C±10°C shut down o/p voltage, automatically recover after cooling.
Environment	Working TEMP.	-40~+60°C (see below derating curve)
	Working Humidity	20~90% RH, non-condensing
	Storage TEMP. Humidity	-40~+80°C, 10~95%RH
	TEMP .coefficient	±0.03%/°C (0~50°C)
	Vibration	10~500Hz, 5G 10min./1 cycle, period for 60min. each along X,Y, Z axes
Safety& EMC	Safety standards	UL8750 + UL1310
	Withstand voltage	I/P-O/P: 1.88KVAC
	Isolation resistance	I/P-O/P: 100MΩ/ 500VDC/ 25°C/ 70%RH
	EMC EMISSION	FCC 47 CFR Part 15, Subpart B
Others	Net. Weight	2.0Kg
	Size	278*108*46mm (L*W*H)
	packing	10 pcs/CTN
Notes		1. All parameters if NOT specially mentioned are measured at 120VAC input , rated load and 25°C of ambient temperature. 2. To extend the driver's using life, please reduce the loading at lower input voltage.

MECHANICAL SPECIFICATION

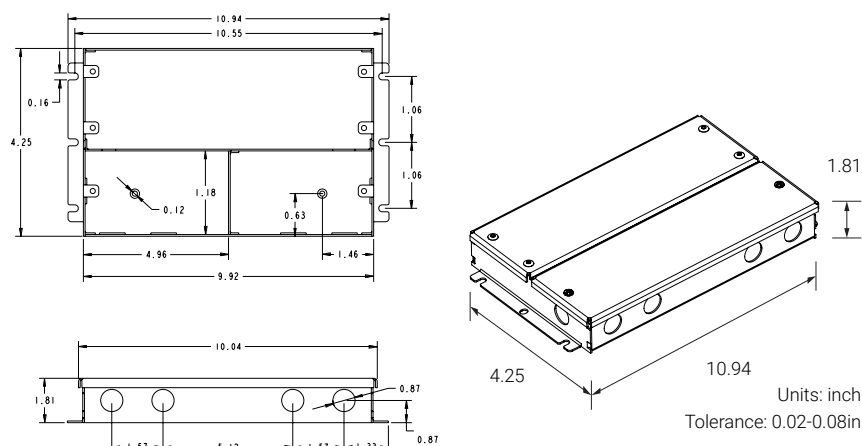

DERATING CURVE

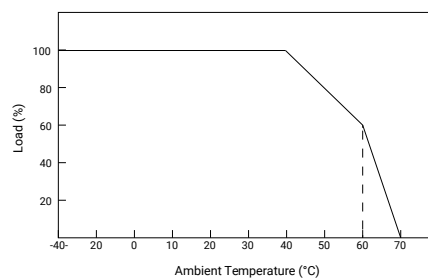


- To extend their life, please refer to the Derating Curve and derate according to the temperature.

- Input wire Black and White to be connected to AC L and N, Green wire go ground,
- Output wire Red to LED Positive side (+), Black to LED Negative side (-).
- Dimming cable DIM (+) Purple to 0/1-10V dimmer signal (+), DIM (-) Grey to 0/1-10V dimmer signal (-)
- Please make sure you connect these correctly otherwise your product will not function correctly and could be damaged.
- Note: Any other requests we can customize.

CONNECTING DIAGRAM


Using two ways of dimming at the same time

You must be assured that LED lighting is up to the max. Brightness then you could operate with the other dimming.

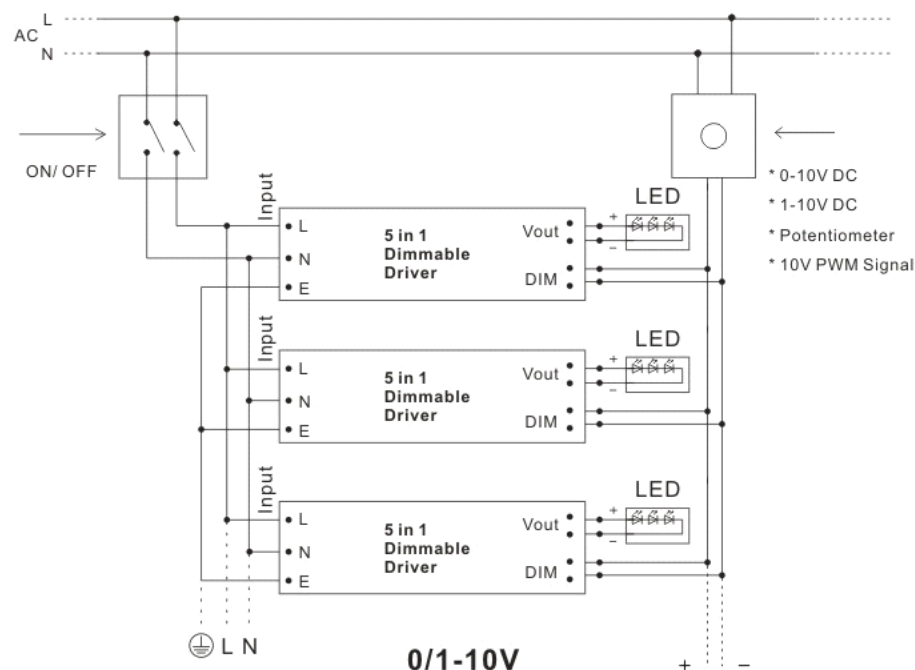



• Using one dimming ---TRIAC/Phase cut dimming

1. The Pulse-Width Modulation (PWM) of output voltage can be adjusted through input terminal of the AC phase line (L) by connection a phase/ Triac dimmer of lighting system.
2. Working with forward phase/ leading edge ,MLV and Reverse phase/ trailing edge, ELV, TRIAC dimmers
3. Min loading is about 10%
4. Please try to use dimmers with power at least 1.5 times as the output power of the driver.

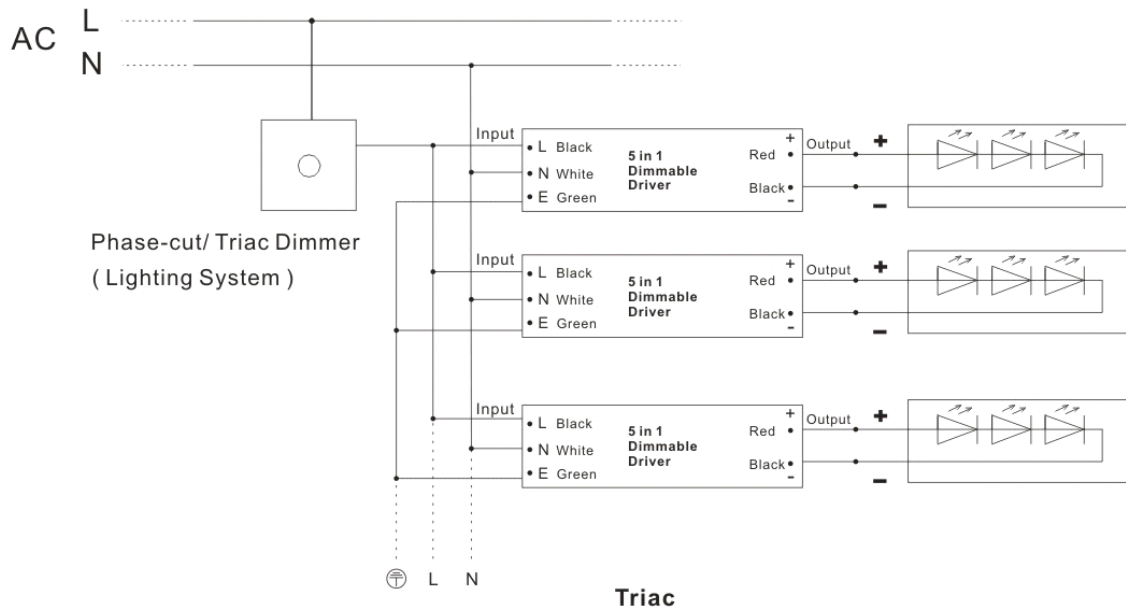

• Using 0-10V/1-10V dimming

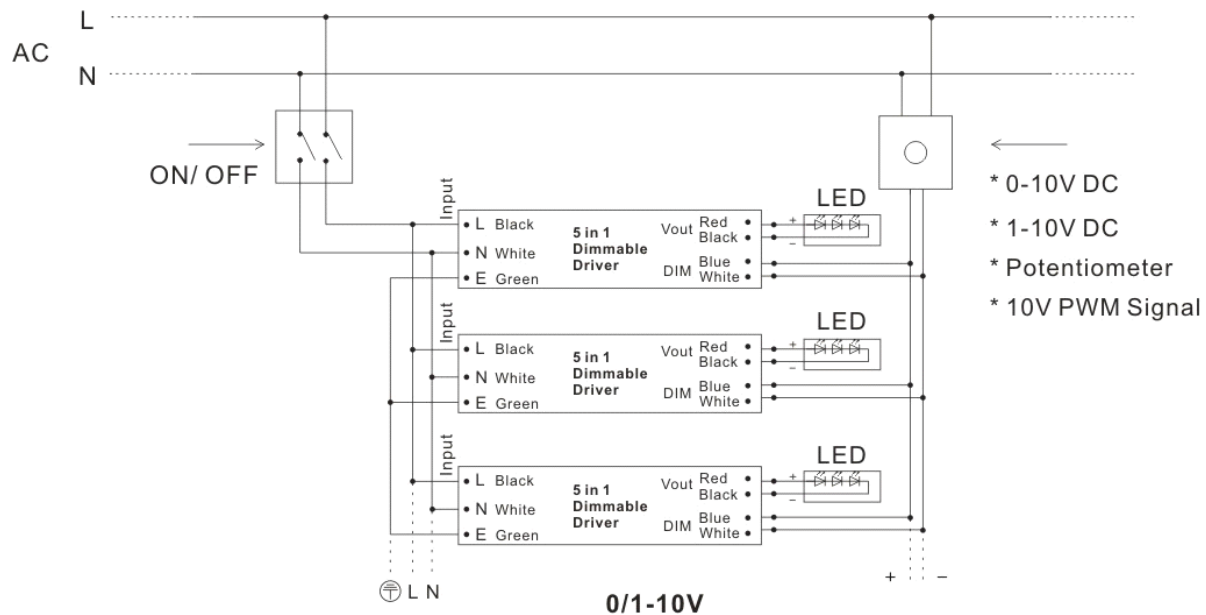

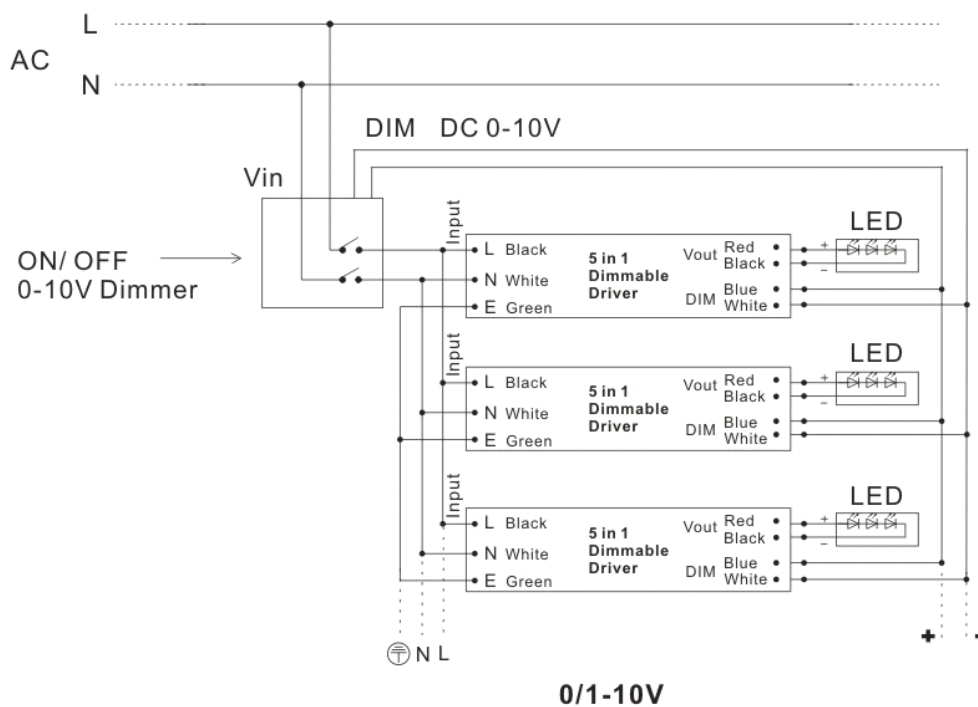

⚠ WARNING

- 1) This driver should be installed by qualified and professional person;
- 2) Please make sure the driver is installed with adequate ventilation around it to allow for heat dissipation.
- 3) Ensure that wiring is correct before test in order to avoid light and power supply damage;
- 4) If driver Cannot work normally, don't maintain privately; Have any question, please contact Joyolight.