




Features

- Highlight SMD5050RGB + flexible FPC
- High brightness
R: 140lm/m (43lm/ft)
G: 370lm/m (113lm/ft)
B: 70lm/m (21lm/ft)
W: 790lm/m (241lm/ft)
Total: 1370lm/m(418lm/ft)
- Precise cutting 50mm/unit
- Waterproof: IP33-IP67
- Working time≥50000H
- Suitable for various dimming controllers

Standard CCT



Various Waterproof Solution

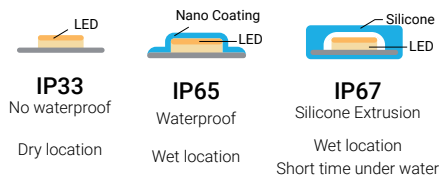

Parameter

Input Voltage	24V DC
Beam Angle	120°
CCT	R/G/B/W
Power	25W/m (7.62W/ft)
Current	RGB: 12mA W: 22mA
Brightness	R: 140lm/m (43lm/ft) G: 370lm/m (113lm/ft) B: 70lm/m (21lm/ft) W: 790lm/m (241lm/ft) Total: 1370lm/m(418lm/ft)
Length / Reel	5m (16.4ft)
Cut Length	50mm/unit
IP Grade	IP33/IP65/IP67
Operating Temperature	-20°C~+45°C
Storage Temperature	0°C~+60°C
Environment Humidity	40-70% RH

Dimension

