



JLS8120-1.5W	24	10	AA	BB	80	DD
Model	Voltage	Width	CCT	IP	CRI	Length
	24: 24V	10: 10mm	27: 2700K 30: 3000K 40: 4000K	33: IP33 (Dry) 65: Nano (Damp) 67: IP67 (Wet)	80: 80+	5m (SD) 50m (MS) Customized

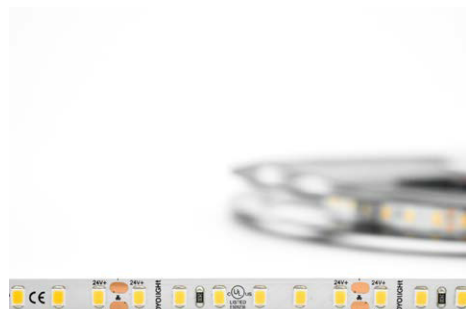


CCT	Power	Brightness	Luminous Efficacy
2700K	1.5 W/ft	149 lm/ft	99 lm/W
3000K	1.5 W/ft	157 lm/ft	105 lm/W
4000K	1.5 W/ft	159 lm/ft	106 lm/W

Project	
Qty	
Date	
Client	


Standard CCT



Waterproof Solution



IP33
No waterproof
Dry location




IP65
Waterproof
Damp location





IP67
Silicone Extrusion
Wet location
Short time under water

LED Type	SMD2835 white
Input Voltage	24VDC
Beam Angle	120°
CRI	80+
Power	4.9W/m (1.5W/ft.)
Current	0.2A/m (0.06A/ft)
Brightness	149lm/ft (2700K); 157lm/ft (3000K); 159lm/ft (4000K)
Length/ Reel	5m(16.4ft)/ 50m(164ft)
Cut Length	50mm/unit (1.97in/unit)
Max. Length (No Voltage drop)	60ft
IP Grade	IP33/ IP65/ IP67
Operating Temperature	-20°C~45°C
Environment Humidity	40-70% RH
LED CCT	2700K/ 3000K/ 4000K
Dimming Method	0-10V, RX, PWM, Triac, RF, Bluetooth, WIFI etc.
Certification	UL, CE, RoHS

DIMENSION

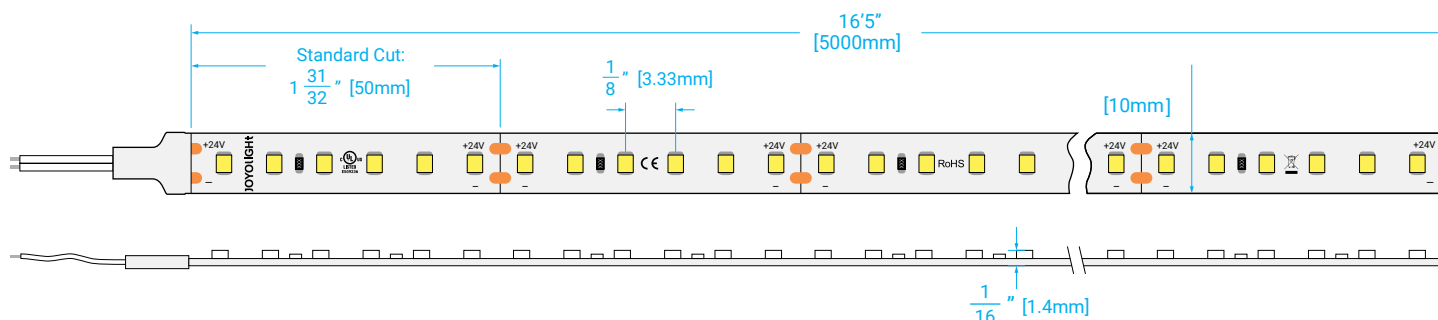

LUMINAIRE PHOTOMETRIC TEST REPORT

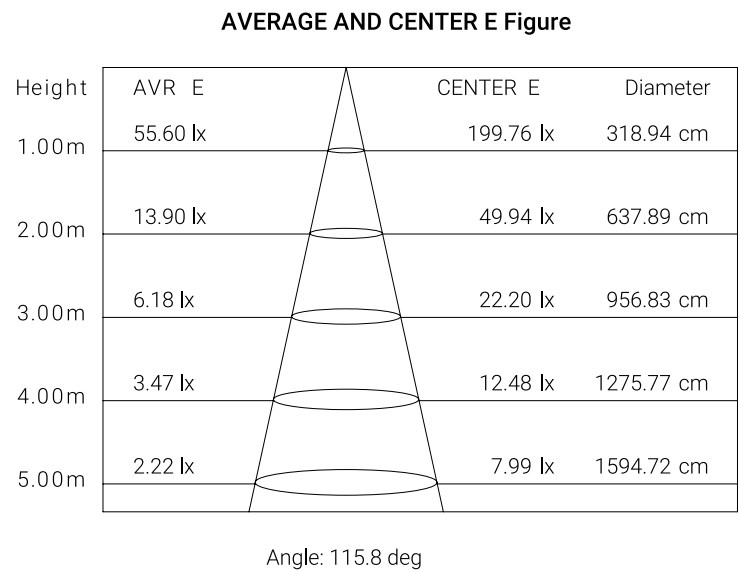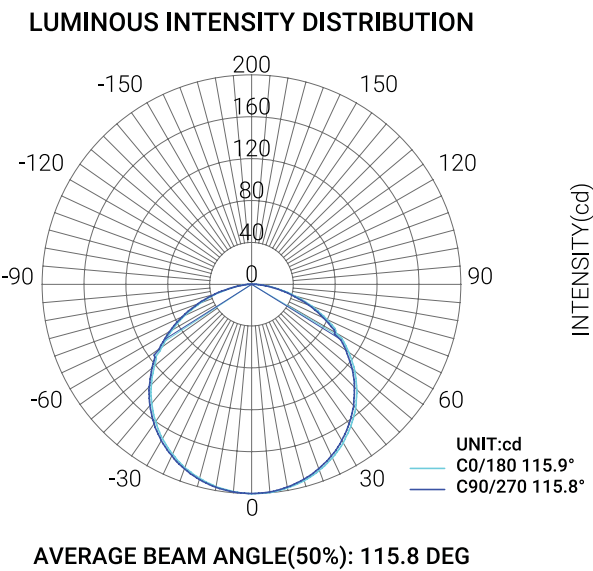

Tested with 1ft 3000K LED strip.

Note: The above graph indicates the illuminated area and the average illumination when luminaire is at different distance.

ACCESSORIES



TC-LC04-10mm

Solderless 2-pin 10mm
IP33&IP65 LED STRIPS
TO 24-14AWG
stranded/ solid wire