

Model	Voltage	Width	CCT	IP	CRI	Length
NE155	24 24: 24V	16 16: 16mm	2700K 3000K 3500K 4000K 5000K 6500K	68 68: IP68 (Wet)	80 80: 80+	5m 10m 50m Customized



Color	Power	Brightness
2700K	0.61 W/ft	29 lm/ft
3000K	0.61 W/ft	29 lm/ft
3500K	0.61 W/ft	29 lm/ft
4000K	0.61 W/ft	29 lm/ft
5000K	0.61 W/ft	29 lm/ft
6500K	0.61 W/ft	29 lm/ft

Project	
Qty	
Date	
Client	

STANDARD CCT



2700K



3000K



3500K



4000K



5000K



6500K

Style	Top-Bend / Side-Bend (White)
Dimension	W10 x H10mm [W0.39 x H0.39in.]
Input Voltage	24VDC
Beam Angle	120°
CRI	80+
Power	2W/m (0.61W/ft)
Max. Length (No Voltage drop)	5m (16.4ft)
Length / Reel	5m (16.4ft); 10m (32.8ft); 50m(164ft)
Cut Length	Free cut to any length
Minimum bending diameter	120mm (4.72in)
Minimum twist degree	360°/1000mm (39.4in)
IP Grade	IP68
Operating Temperature	-20°C~45°C
Lifespac	50,000h (indoor), 5 year warranty; 36,000h (outdoor), 3 year warranty;
LED CCT & Wavelength	2700K; 3000K; 3500K; 4000K; 5000K; 6500K
Dimming Method	PWM (dimmable driver like RF, Bluetooth, 0/1-10V, Triac, DALI, DMX, WIFI etc.)
Certification	UL, TUV-CE, RoHS


WATERPROOF SOLUTION



IP68

Silicone Extrusion

DIMENSION

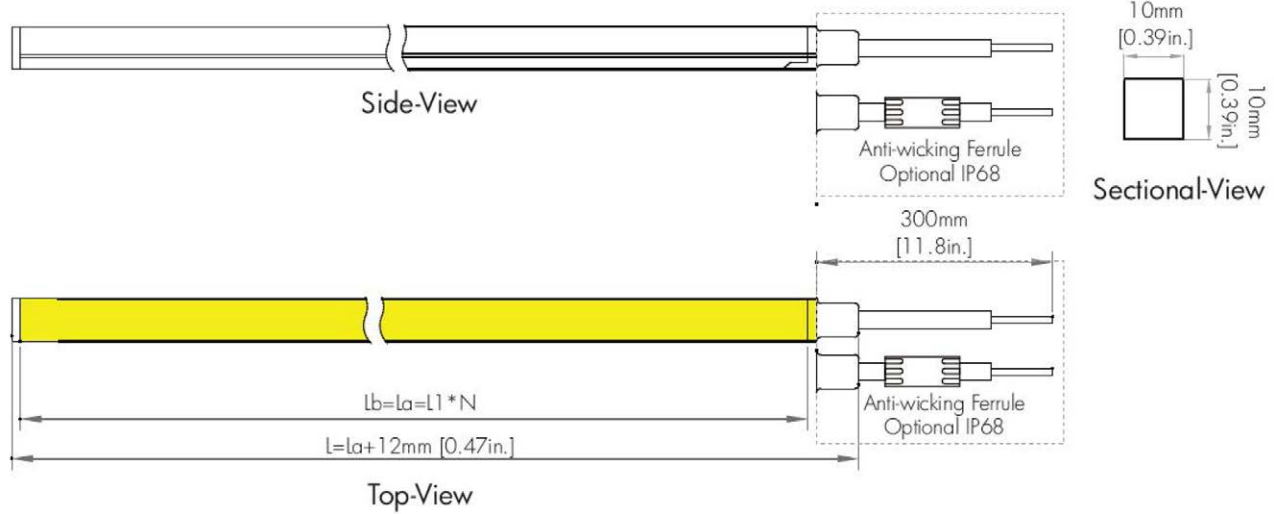

ACCESSORIES



NE155-BR

Bottom mounting brackets for flexible LED neon strip light NE155



NE155-RC

Rigid Aluminum channel for flexible LED neon strip light NE155



NE155-MC

Top mounting clips for flexible LED neon strip light NE155



NE155-FC

Flexible Aluminum channel for side bend LED neon strip light NE155



NE155-WK

Power cable wiring kit for LED neon strip light NE155 [Rear/Side/Bottom]

