


Key Features

- Adopts Bluetooth 5.0 SIG Mesh wireless protocol and DMX signals
- can be paired with Bluetooth drivers and Bluetooth DMX signal converters to expand lighting applications
- supports visual control, traditional lighting panel remote control, and APP-based control

Control Mode	CCT
Input Voltage	12-24VDC, Powered by Class 2
Wireless Type	Bluetooth 5.0 SIG Mesh
Output Signal	DMX 512
Zones	4
Compatible Driver	B5-3A, Bluetooth Driver, DMX Decoder
Working Temperature	-25°C~50°C
Dimensions	L120×W75×H29.5(mm)
Weight(G.W.)	350g

Key Functions

* Network configuration via the L-Home APP, with support for setting RGB or RGBW types

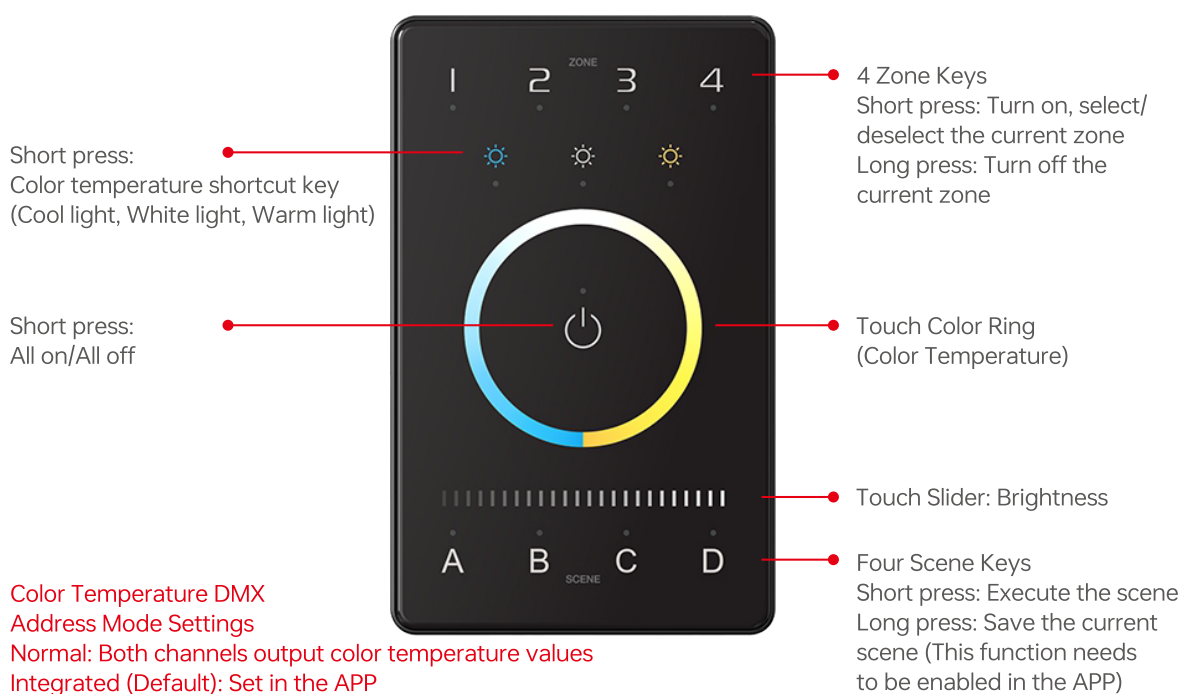

Please ensure the remote control is connected to the power cable.

Wireless bluetooth panel + DMX panel and drivers support diverse lighting applications.

